


40-135A

Tube-Type

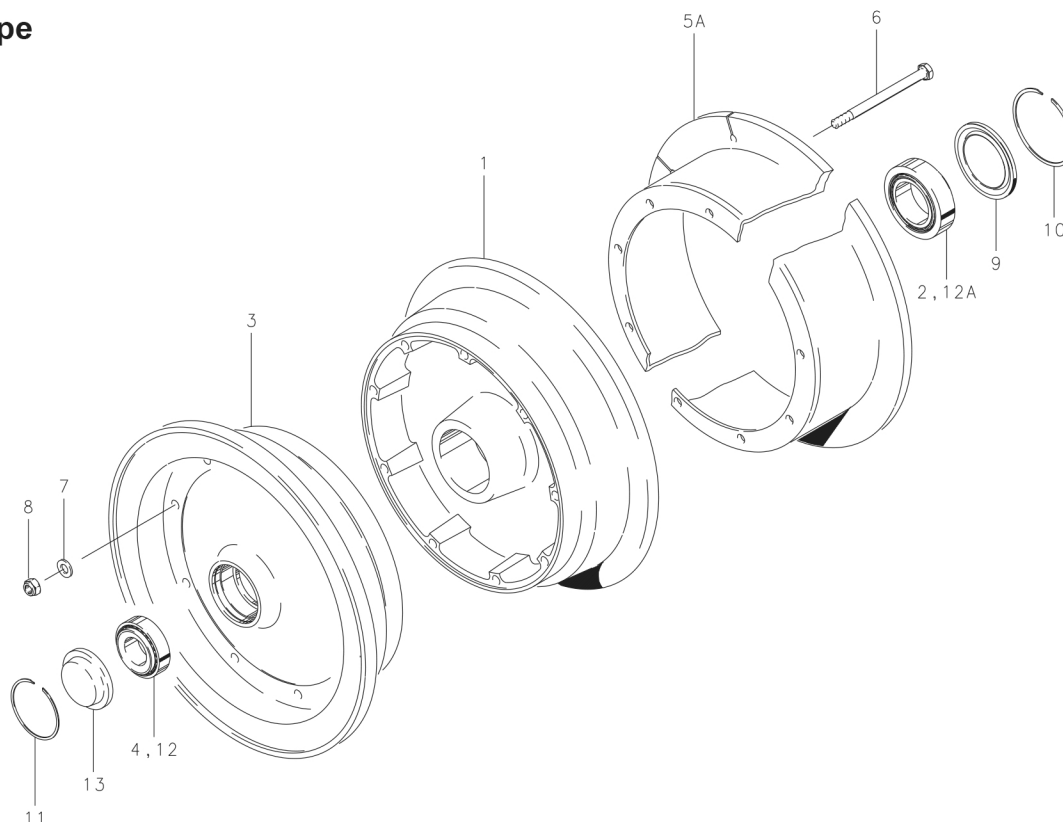

NOTES:

(1) Optional high strength hardware: Qty

103-24200 Bolt (MS21250-05044)	9
095-02800 Washer (MS20002C5)	18
094-13200 Nut	9

Above hardware must be used together to maintain proper grip on bolts – DO NOT mix with AN hardware.

Refer to PRM41 for installation instructions.

FIG.	PART NO.	DESCRIPTION	40-135A (1)
1	161-09900	Inner Wheel Half Assy.	1
2	214-01300	Cup-Bearing	1
3	162-09300	Outer Wheel Half Assy.	1
4	214-03400	Cup-Bearing	1
5A	164-20306	Brake Disc (Slotted)	1
6	103-22400	Bolt (AN5-32A)	9
7	095-10500	Washer (AN960-516)	9
8	094-10400	Nut (MS21044-N5)	9
9	154-03000	Molded Grease Seal	1
10	155-00100	Snap Ring	1
11	155-00600	Snap Ring	1
12	214-01000	Cone-Bearing	1
12A	214-01400	Cone-Bearing	1
13	158-00800	Hub Cap	1